- MODERN INTERIOR DOORS
- SHAKER DOORS
- BI-FOLD DOORS
- GLASS DOORS
- LOUVERED DOORS
- MODERN MOULDINGS



Flush primed doors

WHY SHOULD YOU CHOOSE OUR DOOR Impact resistance

We use eco-friendly high density particle board on the interior of the door which gives strength, durability and sound reduction. Also we clad the door with a 3/16° HDF layer to help with a beautiful finish when painted and adds to the durability of the door.

Our doors are easy to cut to size

Our doors can be modified in height and width up to 2 inches on either side without the need for a rerail. This is possible thanks to the use of a 2.5" thick wood frame all ground the entire door.

High quality multi-coat primer

The first layer of primer is pumped with UV point, which prevents moisture from seeping inside the door, and two subsequent layers of primer with polishing facilitate the final painting and guarantee on excellent appearance of our product.

Beautifully sanded and painted door edges On our doors you will not see saw marks, burrs or wood structure.

The Ideal geometry of the door will facilitate the work of any installer and guarantee no rubbing during opening and closing of the doors.

We use a dense corrective layer in the interior of the hollow core doors to prevent cupping and warping which makes our hollow core doors a leader in the industry.


| | AVAILABLE SIZES SOLID OR SEMI-SOLID CORE | | | | | | | |
|-----|---|-----|---|--------|--|--|--|--|
| W | | Н | | D | | | | |
| 18 | 1 | 80. | × | 1-3/8 | | | | |
| 24- |) | 80. | | 1-3/6* | | | | |
| 28. | 1 | 80. | | 1-3/8 | | | | |
| 30. | 1 | 80. | | 1-3/8* | | | | |
| 32- | 3 | 80' | | 1-3/8 | | | | |
| 34 | 2 | 80. | Х | 1-3/8 | | | | |
| 36- | 1 | BU. | | 1-3/8* | | | | |
| 48- | | 80. | | 1-3/4 | | | | |

| AVAILABLE SIZES SOLID CORE | | | | | |
|-------------------------------|----|-----|---|-------|--|
| w | 14 | Н | ž | D | |
| 24" | ,1 | D6- | | 1-3/8 | |
| 58. | 1 | 96 | T | 1-3/8 | |
| 30. | 1 | D6. | 3 | 1-3/8 | |
| 35. | , | 96 | x | 1-3/8 | |
| 34. | 1 | 96. | j | 1-3/8 | |
| 36. | 1 | De. | 5 | 1-3/8 | |
| 48' | : | 96" | 1 | 1-3/8 | |





| W H D | | | | | | | |
|-------|-----|-----|---|-------|--|--|--|
| vv | 300 | -11 | | U | | | |
| 16. | 1 | 96. | 2 | 1-3/4 | | | |
| 24" | 1 | 96. | | 1-3/4 | | | |
| 58. | X | 96. | × | 1-3/4 | | | |
| 30- | | 56. | | 1-3/4 | | | |
| 32° | 1 | 96. | X | 1-3/4 | | | |
| 34" | , | 96. | | 1-3/4 | | | |
| 36" | 3 | 96* | | 1-3/4 | | | |
| 48" | | 96* | | 1-3/4 | | | |

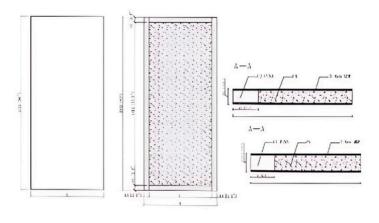

Contemporary



Bilbao


JMD Global's modern-style doors are a premium flush door. Our new modern-style flush doors feature a 3/16" thick HDF veneer. The channels are routed 3/32" deep resulting in sharper shadow lines and a greater definition.

The stile and rail construction is made of finger joint pine with stave core technology. Stave core doors offer excellent stability against warping and provide ideal durability. Stave core technology allows the door to be used in areas with extreme conditions of temperature, humidity and dryness.


| | AVAILABLE SIZES SOLID CORE | | | | AVAILABLE SIZES SOLID OR SEMI-SOLID CORE | | | | |
|-----|-------------------------------|-----|----|----------------|---|---|-----|---|--------|
| W | 30 | Н | 34 | D | W | 1 | Н | | D |
| 18* | t | 96. | 2 | 1-3/4 or 1-3/6 | 18* | t | 80. | х | 1-9/8* |
| 24. | 1 | 95. | | 1-3/4 or 1-3/8 | 24. | ì | 80. | > | 7-3/8. |
| 28. | , | 96. | | 1-3/4 or 1-3/8 | 58. | | 80- | | 1-3/8 |
| 30. | , | 96. | | 1-3/4 or 1-3/8 | 30. | 1 | 60. | ٨ | 1-3/0 |
| 32. | , | 96" | | 1-3/4 or 1-3/8 | 32. | , | 80- | , | 1-3/8 |
| 34. | t | 96. | | 1-3/4 or 1-3/8 | 34" | , | 80- | X | 1-3/8 |
| 36' | 1 | 96' | 7 | 1-3/4 or 1-3/8 | 36, | 1 | 80. | , | 1-3/6 |
| 48* | i | 95 | X | 1-3/4 or 1-3/8 | 48* | | 80- | | 1-3/4 |


LET'S OPEN UP OUR DOORS!

Avalon



Euro






Bi-Fold Doors

Our BI-Fold doors deliver a contemporary style while saving space.

Bi-Folds are available in the same designs as our modern doors with all the quality you expect from JMD GLOBAL.


Available in two (2) or four (4) door units.



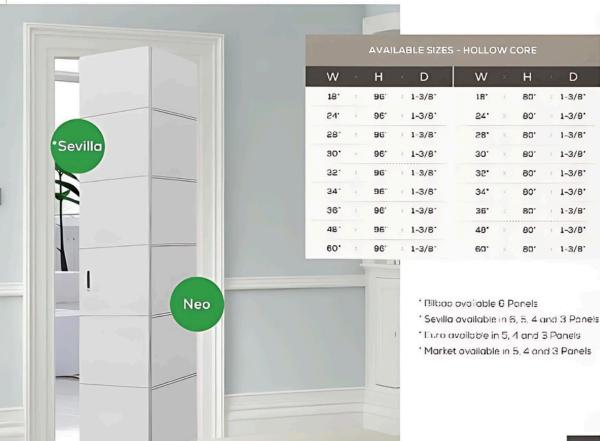

1-Lite White Lami



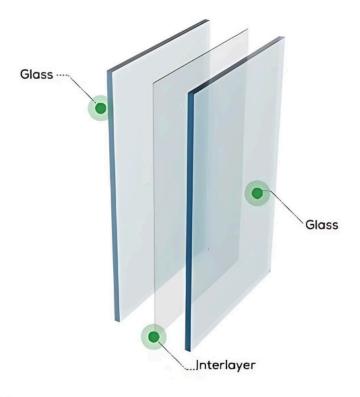


FEATURES & SPECS:

- 1/4° White Lami Privacy Glass
- 5° Stile & Top Rail
- 10° Bottom Rail
- Woodcore / HDF Wrap
- Primed: Ready to Paint
- 5 Year Limited Warranty
- 8/0 & 6/8 Height Available

| | | AVA | ILA | BLE SIZES | - GLASS | S D O | ORS | | |
|-----|---|-----|-----|-----------|---------|-------|-----|---|-------|
| W | | н | , | D | W | ** | Н | X | D |
| 24- | i | 96. | 1 | 1-3/4" | 24. | Х | 90. | | 1-3/8 |
| 28" | 1 | 96- | 1 | 1-3/4" | 28. | × | 80. | | 1-3/8 |
| 30 | 1 | 96. | - 1 | 1-3/4 | 30. | X. | 90. | | 1-3/8 |
| 32- | x | 96 | τ | 1-3/4* | 35. | χ | 80. | | 1-9/8 |
| 34" | 1 | D6. | 1 | 1-3/4 | 34" | | 90. | × | 1-3/8 |
| 36* | | 96- | , | 1-3/4 | 36' | , | 80° | | 1-3/8 |

1 panel plantation louvered door



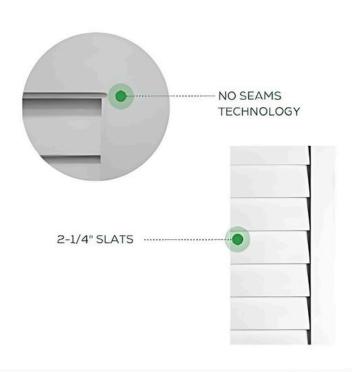


FEATURES & SPECS:

- I panel plantation louver door
- 5' Stile & Top Roil
- 10° Bottom Rail
- Woodcore / HDF Wrap
- Primed; Ready to Paint
- 5 Year Limited Warranty
- 8/0 & 6/8 Height Available

| AVAILABLE SIZES - LOUVERS DOORS | | | | | | |
|------------------------------------|---|-----|---|-------|--|--|
| w | | Н | 1 | D | | |
| 54. | 3 | 80" | 1 | 1~3/6 | | |
| 28" | 1 | 80- | , | 1-3/8 | | |
| 30" | 1 | 80" | | 1-3/8 | | |
| 32" | | 80" | 1 | 1-3/8 | | |
| 36" | 1 | BC" | ; | 1-3/8 | | |

Shaker Solid Core Door

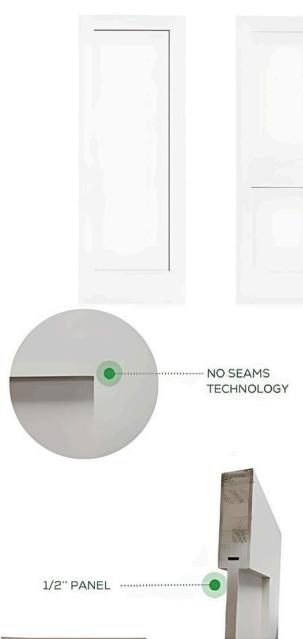



FEATURES & SPECS:

- Shaker door
- 5" Stile & Top Rail
- 1/2" panel
- 10° Bottom Rail
- Woodcore / HDF Wrap
- Primed: Ready to Paint
- 5 Yeor Limited Warranty
- 8/0 & 6/8 Height Available
- Can be 1/2/3/ panel

MODERN MOULDINGS

BASEBOARDS

JB-15 5-1/2"x11/16"x16'

JB-17 7-1/4"x11/16"x16'





CASINGS

JC-12 2-5/8"x11/16"x17'

JC-13 3-1/2"x11/16"x17'





BASEBOARDS

JB-25 5-3/4"x9/16"x16'

JB-27 7-1/4"x9/16"x16'





JB-27

CASINGS

JC-22 2-5/8"x11/16"x17"

JC-23 3-1/2"x11/16"x17'





BASEBOARDS

JB-35 5-3/4"x9/16"x16

JB-37 7-1/4"x9/16"x16'





CASINGS

JC-32 2-5/8"x11/16"x17'

JC-33 3-1/2"x11/16"x17





JB-33

[·] Primed FJ